



# COOL LITE

## UPRIGHT COOLER

### PENDING CERTIFICATIONS

110-120V/60Hz



UL471

NSF/ANSI-7: Type 2 Display Refrigerator

ENERGY STAR® Qualified

## FEATURES

- Exterior Dimensions (WDH): 30" x 29.625" x 78.625"
- Internal Volume: 23.6 cu. ft.
- Footprint: 6.2 sq.ft.
- Dynamic LED lighting in door provides enhanced product illumination while greatly reducing energy consumption
- Forced air refrigeration system for fast product temperature pull down
- Optional side decals for branding awareness
- High density environmentally friendly insulation
- Climate-friendly natural refrigerant
- 5 adjustable powder-coated metal shelves
- Double-paned, Low "E", self-closing glass door
- Standard locking mechanism built-in for security when needed
- Durable pre-painted, chip resistant, steel cabinet
- Heavy-duty, NSF approved, interior liner
- NSF approved interior analog thermometer allows packaged perishable foods to be merchandised safely
- Adjustable temperature control
- 9' heavy-duty power cord



# TECH SPECS

Refrigerant	R290
Amps	2.7
Volts/Hz	110-120V/60Hz
Compressor HP	1/3




# DIMENSIONS

Exterior (WDH)	30" x 29.625" x 78.625"
Interior (WDH)	26.5" x 25.125" x 63.75"
Shelf (WD)	25.875" x 23.25"
Internal Volume	23.6 cu.ft.

# SHIPPING SPECS

Gross Weight	361.5 lbs
Net Weight	306 lbs
Carton Dims (WDH)	30.75" x 31" x 84.5"
Units Per Pallet	1
Shipping Options (Floor Loaded)	20' ~21 40'HQ ~42


# PACKOUT CAPACITIES

		Facings			Deep	Total Capacity	Total Rows
	9 Shelves	10	x	8		=800*	10
	Base	10	x	8			
	7 Shelves	10	x	8		=640*	8
	Base	10	x	8			
	5 Shelves	9	x	8		=432**	6
	Base	9	x	8			

\*Additional shelves, beyond what is supplied with the cooler, may be required to achieve this maximum pack-out.

\*\*20oz pack-outs may vary depending on package size.

## EXTERIOR DIMENSIONS

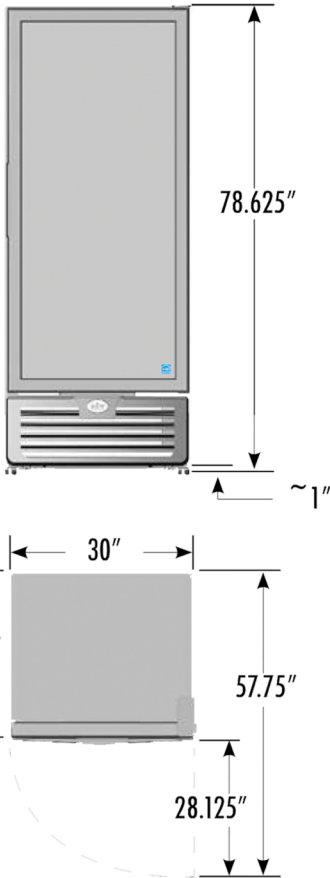

## INTERIOR DIMENSIONS

